




## ALASKA 200 START 230V 12-24V

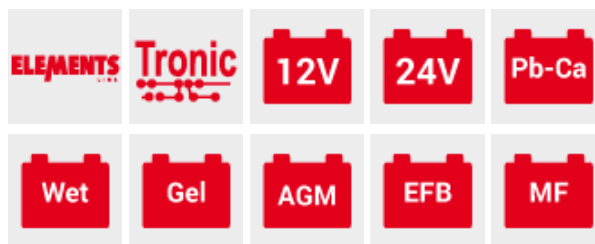

### Overview

#### ALASKA 200 START 230V 12-24V

cod. 807577

Battery charger and maintainer with electronic control of the charging current, automatic interruption and restart (TRONIC), for charging lead-acid batteries with 12/24V voltage of motorcycles, vehicles, vans, light trucks.

Charge options: normal CHARGE, BOOST quick charge, automatic TRONIC charge and maintenance of WET,GEL,AGM: SPIRAL,MF, START-STOP batteries.

#### Features:

- choice of CHARGE, TRONIC mode
- visualization of charging current (CHARGE)
- warning LED to indicate battery charge status, end of charge, maintenance (TRONIC)
- choice of output voltage, charge voltage, start
- protection against overloads and polarity reversal.



1 PH 230V



CE MARKING



EAC CERTIFICATION

### Technical data

CODE	CODE 807577	EFFECTIVE CHARGING CURRENT	25 / 12 A	ADJUSTMENT POSITIONS	2
SINGLE PHASE MAINS VOLTAGE	230 V	RATED CHARGE CURR. EN60335-2-29	15 / 8 A	DIMENSIONS	24,5 x 19,5 x 13 cm
MAINS FREQUENCY	50 / 60 Hz	START CURRENT 1V/C EN60335-2-29	100 A	WEIGHT	7,57 kg



## ALASKA 200 START 230V 12-24V



CHARGE POWER 0,3 KW



MAX STARTING CURRENT 150 A



EAN CODE 800489794849 2



START POWER 2,2 KW



MIN. RATED REFERENCE CAPACITY  
25 / 30 A



PIECES/PALLET 72 pz/pallet



CHARGING VOLTAGE 12 / 24 V



MAX RATED REFERENCE CAPACITY  
300 / 160 A