




DOCTOR CHARGE 50 230V 6V/12V/24V

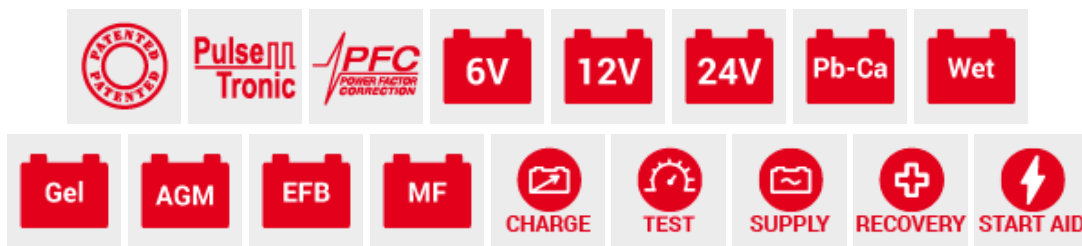

Overview

DOCTOR CHARGE 50 230V 6V/12V/24V

cod. 807586

Electronic BATTERY MANAGER for total maintenance of WET, GEL, AGM, MF, SPIRAL, START-STOP batteries at 6/12/24V and for support activities when intervening on vehicles in workshops, repair shops and car dealer premises.

The innovative Power Stream technology guarantees better performance, up to 50% more than traditional battery chargers. The Pulse Tronic technology guarantees optimal battery charging over 8 phases.

Doctor Charge 50 carries out 5 functions:

1. automatic charge and maintenance of batteries with PULSE TRONIC technology, even in difficult environmental conditions (low temperatures);
2. battery tests such as voltage at terminals, starting capacity (CCA) and operational check of the vehicle alternator;
3. recovery of sulphated or very discharged batteries, and recovery of optimal operation with periodic regeneration;
4. stable power supply source for battery changes (to protect the on-board electronics), for diagnostic activities (operation checks carried out on the vehicles), for keeping the batteries of display vehicles in showrooms operational;
5. vehicles start aid.

Based on the SMPS (Switch Mode Power Supply) Technology. In case of black-outs or repetitive uses Doctor Charge 50 can set itself at the last settings carried out, furthermore the cables can be calibrated according to their type (different lengths and/or sections). Many protections available. Fit with PFC device.

Technical data

CODE	CODE 807586	A_{EN}	RATED CHARGE CURR. EN60335-2-29 40 / 40 / 20 A	W H L	DIMENSIONS 33 - 10 - 16 cm
V_{1PH}	SINGLE PHASE MAINS VOLTAGE 230 V	A_{1V/C}	START CURRENT 1V/C EN60335-2-29 40 (Boost)/70 (Start) A	kg	WEIGHT 3,7 kg
F	MAINS FREQUENCY 50 / 60 Hz	C_{MIN}	MIN. RATED REFERENCE CAPACITY 10 Ah	BAR CODE	EAN CODE 800489795904 7



DOCTOR CHARGE 50 230V 6V/12V/24V



CHARGING ABSORBED POWER 600 W



MAX RATED REFERENCE CAPACITY
600 Ah



PIECES/PALLET 99 pz/pallet



CHARGING VOLTAGE 6 / 12 / 24 V



ADJUSTMENT POSITIONS 7



PIECES/PALLET - B 88 pz/pallet - B



EFFECTIVE CHARGING CURRENT 45 /
45 / 23 A

Included Accessories