




T-CHARGE 20 EVO 12V/24V

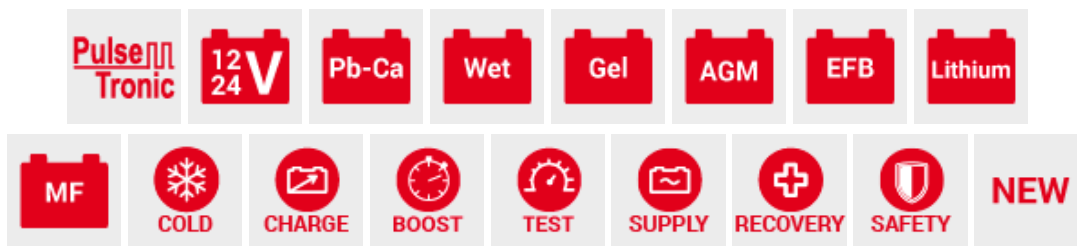

Overview

T-CHARGE 20 EVO 12V/24V

cod. 807596

Multi-functional electronic battery charger, trickle charger and tester for WET, GEL, AGM, MF, PbCa, EFB, Li 12V/24V batteries with LCD display.

Charging and maintenance programs in Pulse Tronic dedicated to the technology of the selected battery. BOOST function for quick charge. Advanced function for charging and maintenance of batteries at low temperatures. Activation of the RECOVERY function enables resetting of sulphated batteries. Tests the vehicle alternator and battery. Continuous and reliable power supply source during battery changes. Simplified use and immediate display of the parameters thanks to the LCD display.

Features:

- Automatic charge and maintenance in Pulse Tronic based on the technology of the selected battery;
- BOOST function for quick charge of the batteries;
- COLD function to charge and maintain batteries at low temperatures;
- RECOVERY function to recover sulphated batteries;
- TEST function for battery, starting and alternator;
- SUPPLY function for stable power supply during battery changing;
- LCD display;
- Protection against overcharge, short circuit and polarity reversal.

Complete with cable with clamps and cable with eyelets.



1 PH 230V



BOAT



EXCAVATOR



MOTORCYCLE



TRACTOR



CE MARKING



CAR



SMALL VAN



T-CHARGE 20 EVO 12V/24V

Technical data

CODE	CODE 807596	A_{EFF}	EFFECTIVE CHARGING CURRENT 8 / 4 A	ADJUSTMENT POSITIONS AUTOMATIC	
V_{1PH}	SINGLE PHASE MAINS VOLTAGE 230 V	A_{EN}	RATED CHARGE CURR. EN60335-2-29 8 / 4 A	IP	PROTECTION DEGREE IP65
F	MAINS FREQUENCY 50 / 60 Hz	C_{MIN}	MIN. RATED REFERENCE CAPACITY 5 A	W H L	DIMENSIONS 30 x 9,5 x 5,5 cm
P	CHARGING ABSORBED POWER 115 W	C_{MAX}	MAX RATED REFERENCE CAPACITY 180 A	kg	WEIGHT 1,35 kg
	CHARGING VOLTAGE 12 / 24 V				