




ALASKA 200 START 230V 12-24V

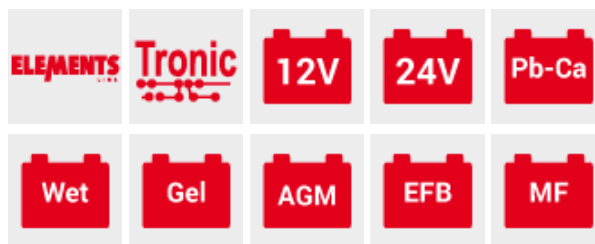

Visão global

ALASKA 200 START 230V 12-24V

cod. 807577

Carregador de baterias com controlo eletrónico da corrente de carga, interrupção automática e re arranque (TRONIC), para baterias a chumbo de 12/24V, de motociclos, automóveis, carrinhas, camiões ligeiros.

Opções de carga: normal - CHARGE, rápida - BOOST, automática - TRONIC, carga e manutenção de baterias WET,GEL,AGM: SPIRAL,MF, START-STOP.

Características:

- escolha do modo CHARGE, TRONIC
- visualização da corrente de carga (CHARGE)
- LED para informação do estado de carga da bateria, fim da carga, manutenção (TRONIC)
- escolha da voltagem de saída, voltagem de carga, arranque
- proteção contra sobrecargas e inversão de polaridade.



1 PH 230V



BOAT



NFZ



MOTORCYCLE



TRACTOR



CE MARKING



CAR



SMALL VAN



EAC CERTIFICATION

Especificações



CODE 807577



EFFECTIVE CHARGING CURRENT 25 / 12 A



ADJUSTMENT POSITIONS 2



ALASKA 200 START 230V 12-24V

SINGLE PHASE MAINS VOLTAGE 230 V	RATED CHARGE CURR. EN60335-2-29 15 / 8 A	DIMENSIONS 24,5 - 19,5 - 13 cm
MAINS FREQUENCY 50 / 60 Hz	START CURRENT 1V/C EN60335-2-29 100 A	WEIGHT 7,57 kg
CHARGE POWER 0,3 KW	MAX STARTING CURRENT 150 A	EAN CODE 800489794849 2
START POWER 2,2 KW	MIN. RATED REFERENCE CAPACITY 25 / 30 Ah	PIECES/PALLET 72 pz/pallet
CHARGING VOLTAGE 12 / 24 V	MAX RATED REFERENCE CAPACITY 300 / 160 Ah	