




## DOCTOR CHARGE 50 230V 6V/12V/24V

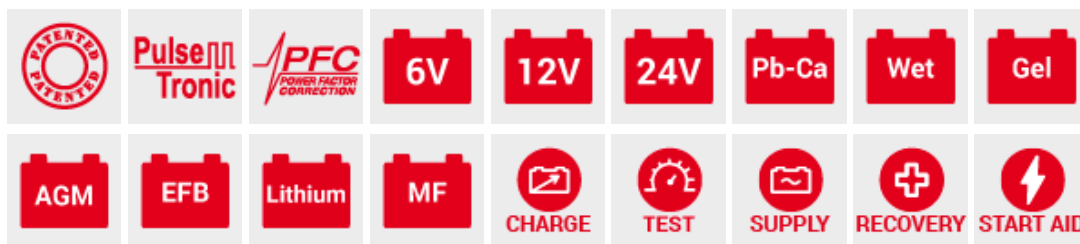

### Обзор

#### DOCTOR CHARGE 50 230V 6V/12V/24V

cod. 807598

Electronic BATTERY MANAGER for total maintenance of

WET, GEL, AGM, MF, PbCa, EFB und Li batteries at 6/12/24V and for support activities when intervening on vehicles in workshops, repair shops and car dealer premises.

The innovative Power Stream technology guarantees better performance, up to 50% more than traditional battery chargers.

The Pulse Tronic technology guarantees optimal battery charging over 8 phases.

Doctor Charge 50 carries out 5 functions:

1. automatic charge and maintenance of batteries with PULSE TRONIC technology, even in difficult environmental conditions (low temperatures);
2. battery tests such as voltage at terminals, starting capacity (CCA) and operational check of the vehicle alternator;
3. recovery of sulphated or very discharged batteries, and recovery of optimal operation with periodic regeneration;
4. stable power supply source for battery changes (to protect the on-board electronics), for diagnostic activities (operation checks carried out on the vehicles), for keeping the batteries of display vehicles in showrooms operational;
5. vehicles start aid.

Based on the SMPS (Switch Mode Power Supply) Technology. In case of black-outs or repetitive uses Doctor Charge 50 can set itself at the last settings carried out, furthermore the cables can be calibrated according to their type (different lengths and/or sections). Many protections available. Fit with PFC device.



1 PH 230B



МАРКИРОВКА CE



СЕРТИФИКАЦИИ EAC

### Технические данные

**CODE** КОД 807598

**A<sub>EN</sub>** ТОК КОНВЕНЦИОНАЛЬНОГО ЗАРЯДА EN60335-2-29 40 / 40 / 20 A

**W<sub>H</sub>** РАЗМЕРЫ 33 x 10 x 16 cm











**V<sub>1PH</sub>** ОДНОФАЗНОЕ НАПРЯЖЕНИЕ СЕТИ 230 V

**A<sub>1V/C</sub>** ТОК ЗАПУСКА 1V / C EN60335-2-29 40 (Boost)/70 (Start) A

**kg** ВЕС 3,7 kg



## DOCTOR CHARGE 50 230V 6V/12V/24V

 ЧАСТОТЫ СЕТИ 50 / 60 Hz	 МИН. НОМИНАЛЬНАЯ ССЫЛКА ПОТЕНЦИАЛ 10 A	 КОД EAN 800489706427 7
 ПОГЛОЩЕННАЯ МОЩНОСТЬ ЗАРЯДА 600 W	 МАКС. НОМИНАЛЬНАЯ ССЫЛКА ПОТЕНЦИАЛ 600 A	 ЧАСТЕЙ / ПАЛЛЕТ 99 pz/pallet
 НАПРЯЖЕНИЕ ЗАРЯДКИ 6 / 12 / 24 V	 РЕГУЛИРОВКА ПОЗИЦИИ 7	 ЧАСТЕЙ / ПАЛЛЕТ - B 88 pz/pallet-B
 ТОК ЭФФЕКТИВНОГО ЗАРЯДА 45 / 45 / 23 A		

### Входящие в комплект аксессуары

null - 124874