




ALASKA 150 START 230V 12V

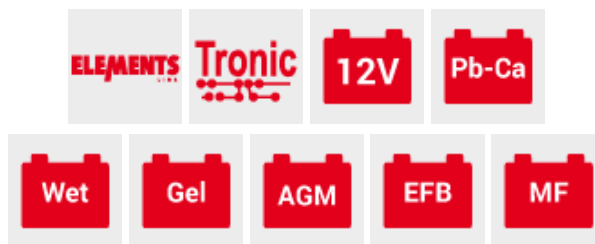

Overview

ALASKA 150 START 230V 12V

cod. 807576

Battery charger and maintainer with electronic control of the charging current, automatic interruption and restart (TRONIC), for charging lead-acid batteries with 12V voltage of motorcycles, vehicles, vans, light trucks.

Charge options: normal CHARGE, BOOST quick charge, automatic TRONIC charge and maintenance of WET, GEL, AGM: SPIRAL, MF, START-STOP batteries.

Features:

- choice of CHARGE, TRONIC mode
- visualization of charging current (CHARGE)
- warning LED to indicate battery charge status, end of charge, maintenance (TRONIC)
- choice of output voltage, charge voltage, start
- protection against overloads and polarity reversal.



1 PH 230V



CE MARKING



EAC CERTIFICATION

Technical data

CODE	CODE 807576	EFFECTIVE CHARGING CURRENT	20 A	ADJUSTMENT POSITIONS	2
SINGLE PHASE MAINS VOLTAGE	230 V	RATED CHARGE CURR. EN60335-2-29	12 A	DIMENSIONS	24,5 x 19,5 x 13 cm
MAINS FREQUENCY	50 / 60 Hz	START CURRENT 1V/C EN60335-2-29	50 / 100 A	WEIGHT	5,9 kg



ALASKA 150 START 230V 12V



CHARGING ABSORBED POWER 220 W



MIN. RATED REFERENCE CAPACITY 10 A



EAN CODE 800489794848 5



CHARGING VOLTAGE 12 V



MAX RATED REFERENCE CAPACITY 200 A



PIECES/PALLET 72 pz/pallet